



# HDC10-12S05 Series

**SHINHOM**  
www.shinhom.com

## 产品命名方式 Product Nomination Method

举例 Forexample		H	DC	10	—	24	S	05
		①	②	③		④	⑤	⑥
①	宽压输入: Wide input voltage					④	表示输入电压标称值 nominal value of input voltage	
②	电源转换模式 DC-DC: Power conversion mode DC-DC					⑤	S 单路输出 S: Single output	
③	表示输出功率大小 Ouput Power					⑥	输出电压大小 Output Voltage	


## 典型产品列表 Typical product tabulates

型号 TYPE	输入电压范围 Input voltage range	输出电压/电流 (Output voltage / current)					
		VO1		VO2		VO3	
		V	mV	V	MA	V	MA
HDC10-24S05	24V (10-33) v	5V	2000mA				

注: □ 代表输入电压标称值, 因篇幅有限, 以上只是部分产品列表, 若需列表以外产品, 请与本公司销售部联系。

□ Shows the nominal value of input voltage, due to space limitations the above list is only for some products. If other than a list of products, please contact the Company's sales department.

## 封装尺寸图 Mechanical Data

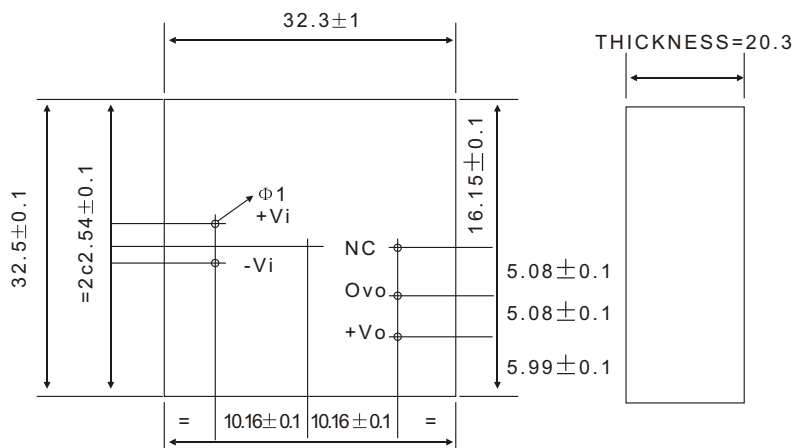

NOTE: ALL UNITS ARE IN MILLEMETER (MM)